

Toyota RAV 4 5DR 2000 -2006

Our ref: H0237

Suits both boot liner versions:

FORWARD - Seats slid as far forward as possible

BACK - Seats slid as far back as possible



REF: 107

PACKING REQUIREMENTS

BOOTLINER

Ref: 107 x 6 "J" profile plastic clips/fasteners
Minimum 10 x self-adhesive loop fastener tabs

TAILGATE COVER

Minimum 16 x self-adhesive loop fastener tabs

Note: customer has placed cut-outs in the base for the dig guard. If you choose to do so: do NOT cut through the tape!

PREPARATION

Ensure the 2ND row seats are positioned to suit your order.

The Rear seat back rests are to be reclined to the 2nd locked position

VERY IMPORTANT PREPARATION



To ensure a good bond, when using the self-adhesive hook & loop fasteners to attach the Bootliner to the plastic / metal trim (**Not** the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any self-adhesive fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The fasteners cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**.

Unfortunately we are unable to supply this product, as it cannot be transported via our postal carrier.

NOTE: the adhesive takes 24hrs to reach full adhesion, do not disturb during.

FITTING

- Remove load space cover cassette. Place boot liner into the vehicle, the panel with the label sits against the back of the rear seats.

BASE:

- Position base of the liner snugly into place. The hook fastener welds will attach directly to the carpet.


FRONT PANEL

- Pass the hook & loop fastener straps around the headrest posts and fasten close to the liner. The hook fastener welds attach directly to the carpet panels.

SIDE PANELS

- Position the side panels snugly into place.
- Use the self adhesive loop fastener tabs to attach the side panels to the plastic
- We supply the ref 107 clips which can be used to fix the section of the side panel over the access pockets.
Photo A : Open pocket and push on the clip to the top edge.
Photo B: Clips can be cut to size.
Once in place the side will fasten to this additional fastener

Push onto top edge of panel

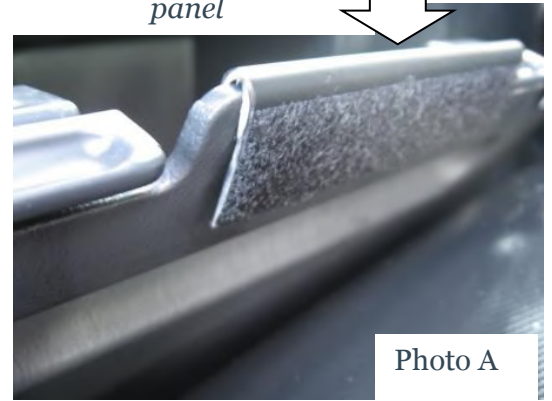

Optional extras

Please note the following photos are non-specific to your vehicle

TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.

BUMPER FLAP

- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.
- Please note that the edges of the fabric are not bound so that any mud, dirt or water can run off.

SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the **Rear Plus** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Attach the Seat Flap to the fastener strip that has been manufactured into the Boot Liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.

