

## LANDROVER DISCOVERY 3 - 2004 - 2009

Our ref: Ho382

### PACKAGING REQUIREMENTS.

#### BOOTLINER

- 26x self-adhesive loop fastener tabs
- 2 cut lengths of self-adhesive loop fastener @ 840mm long
- **7 Seater versions** – 4 x ref 107 Black 'J' profile plastic / fastener clips



NOTE: Photo shows a rear plus liner with additional split front and tailgate cover – Fitted to Discovery 3

#### WINDOW SILL FLAPS

- Additional sill flaps require - 6x ref: 116 flat plastic tabs with long fastener strip
- 10x self-adhesive loop fastener tabs



REF:107

REF:116

#### REAR DOOR COVER

- Tailgate cover - Minimum of 14 self-adhesive loop fastener tabs



### VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive hook & loop fastener to attach the cover to the plastic trim it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any fastener pads, the surface **MUST be thoroughly cleaned** using a silicone remover. (The fastener cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**.

**NOTE:** the adhesive takes 24hrs to reach full adhesion – do not touch during.





## STEP 1. PREPERATIONS

- Remove the load cover cassette. It may be replaced later.
- Unlock the rear seat back rest and recline slightly

*Please note not all of the photographs are specific to your vehicle*

## STEP 2. FITTING BASE

- **BASE:** Locate the pocket at the tailgate end of the liner's base. Position over the plastic hinge cover.
- Position base of the liner snugly into place  
**FOR VEHICLES WITHOUT 3<sup>RD</sup> ROW SEATS.**
- At the rear seat end: The two tabs are to be wrapped around and attached to the under side of the carpeted floor panel, using the self-adhesive loop fastener pads.  
**FOR VEHICLES WITH 3<sup>RD</sup> ROW SEATS.**
- See **Photo A+B:** There are four plastic panels on the rear side face of the folded flat 3<sup>rd</sup> row seat bases. Slide each of the Black 'J' profile plastic / fastener clips (ref 107) as shown. The base panel will fasten close to these clips.

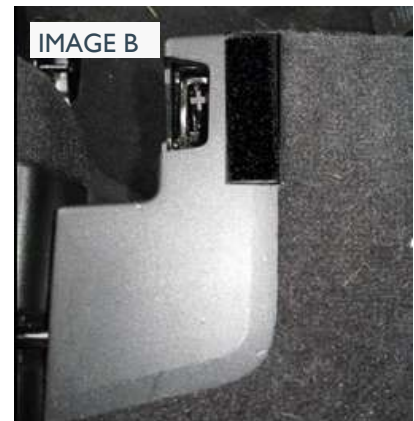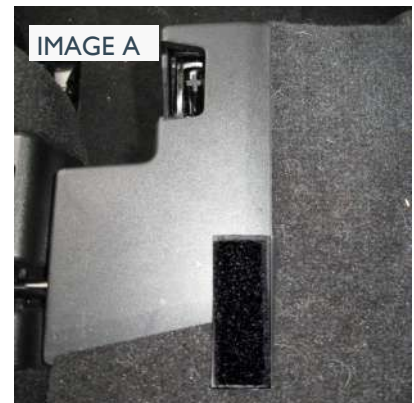

## STEP 3. FITTING THE FRONT

- Pass the hook & loop fastener straps around the headrest posts and fasten close to the liner. The four hook fastener welds require self-adhesive loop fastener to attach to the plastic seat catches.

### REAR PLUS VERSIONS

*You MUST unfasten the hook & loop fastener + the headrest straps before you recline the rear seat uppers. ('Please refer to REAR PLUS options on website to see detailed photo')*



## STEP 4. FITTING THE SIDES

- Position the side panels snugly into place. Use the self-adhesive loop fastener to attach the liner to the plastic panels.



## STEP 5. SILL FLAPS

If you have purchased Additional Flaps (image C)  
The Front of the flaps have the long strip of hook fastener sewn into the taped edge  
There is a cut out in the flap that will sit around the 3<sup>rd</sup> row seat belts

- Locate the 6 (2 lots of 3) slots and hook fastener welds in the flaps: you now need to fit the following air vent clips (plastic tab with fastener strip our ref: 116) In line with each slot, insert the plastic section of one of the air vent clips. (See photo D). ENSURE THE WRONG SIDE OF THE FASTENER FACES UPWARDS. Chose the second slot from the window, so as to allow you to pass the fastener through the slot in the flap (See photo E) and “fasten-close”(See photo F)
- Please note photos A – C are non-specific to your car
- Use the self-adhesive loop fastener to attach the rest of the flaps snugly into place



## STEP 5B. OPTIONAL

If you want to re-insert your load cover cassette once the window sill flaps are installed, you may do so by cutting a square shown in image G & H & I






# OPTIONAL EXTRAS

Please note the following photos are non-specific to your vehicle

## STEP 5A. SEAT FLAP



- You will receive 2 seat flaps when you purchase this Optional Extra regardless of which version Boot Liner you have ordered.
- The “CUT-OUT” version (image 0) is used when the seats are in an upright position.
- The other flap supplied is to be used in conjunction with the **Rear Plus** Option(s). With the rear seats in the folded position this Seat Flap extends the coverage over exposed sections of the seat backs and the headrests.
- Lower the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot Liner just below the top of the rear seats. (image 1)
- The flap is then placed over the rear head rests and down the back of the passenger seats. (image 2)
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.

## STEP 5B. TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the Tailgate.
-  Fix the upper / curved section first to the plastic trim
- The lower section fits under the floor hinge flap, and the self-adhesive fastener tabs are attached to the metal trim.

## STEP 5C. BUMPER FLAP

- Fit Boot liner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap is one standard length for all models. Trim the length to suit your requirements. Ensure you do not cut through the stitching
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you

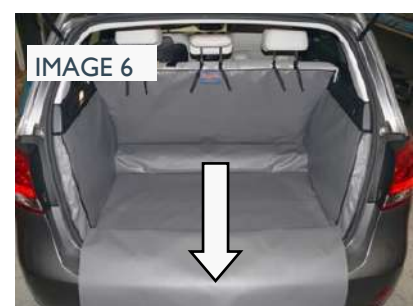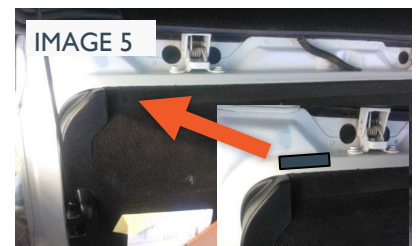

## OPTIONAL EXTRAS page 2

*Please note the following photos are non-specific to your vehicle*

### STEP 5D. FLOOR EXTENSION

The “Floor extension” offers superior protection to the rear seats when purchased in conjunction with a REAR PLUS option.

- The Floor extension is designed to attach to a Rear Plus version liner.
- It offers additional protection to the back of the front seats and the extended floor area when the rear seats are folded flat.
- The max width is 148cm (see photo on left).
- It will offer no protection to the rear doors

PLEASE REQUEST FURTHER INFORMATION AS YOU PLACE YOUR ORDER (*The Seat Flap 5A, The Bumper Flap 5C & The Floor Extension 5D cannot be added at a late date*)

