

Toyota RAV 4 5DR 2006 - 2013

Our ref: Ho411

The Liner has been designed with the 2ND row seats slid as far back to the tailgate end and in the most upright position.

PACKING REQUIREMENTS

- BOOT LINER
2 x 530mm cut lengths of self-adhesive loop fastener
Minimum 4 x self-adhesive loop fastener tabs
- TAILGATE COVER
Minimum 17 x self-adhesive loop fastener tabs



Note: There is extra loop fastener on the front of this liner, however the model has been modified since and will NOT be on your order. The fastener on the base is to accept a bumper flap. This is not standard!

PREPARATION

Ensure the 2ND row seats are slid as far back to the tailgate end and in the most upright position. See Photo A to indicate the Seat rake



Photo A

VERY IMPORTANT PREPARATION



To ensure a good bond, when using the self-adhesive hook & loop fastener to attach the boot liner to the plastic / metal trim (**Not** the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any hook & loop fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The hook & loop fastener cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**.

Unfortunately we are unable to supply this product, as it cannot be transported via our postal carrier.

NOTE: the adhesive takes 24hrs to reach full adhesion, do not disturb during.

FITTING

- Remove load space cover cassette, it can be replaced later.

BASE:


- Position base of the liner snugly into place.

FRONT PANEL

- Pass the hook & loop fastener straps around the headrest posts and fasten close to the liner. The four hook fastener welds attach directly to the carpet panels.

SIDE PANELS

- Position the side panels snugly into place. Take note of where the top edge sits. Position the two long strips of self-adhesive loop fastener just below this line.
- You will need to cut a 'v' wedge out of the fastener at the point where the angle changes. See Photo B
- Use the remaining small loop fastener tabs to attach the rest of the side panels.
- Attach the ties to the seat belt tidies. (Remove the seat belts first, tie and then replace)

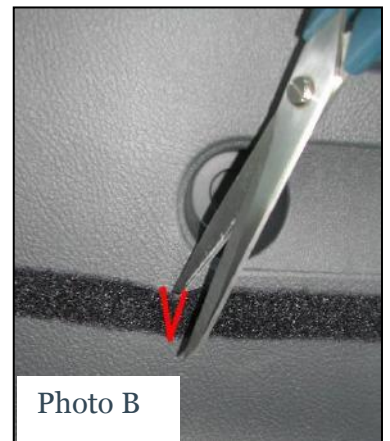

Optional extras

Please note the following photos are non-specific to your vehicle

TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



BUMPER FLAP

- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.
- Please note that the edges of the fabric are not bound so that any mud, dirt or water can run off.



SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the **Rear Plus** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the boot liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.

