

BMW 5Series Touring 2010-2017

Our Ref. H0509



REF: 129

Packing requirements

BOOTLINER

- 2 x of 30mm wide self-adhesive loop fastener: cut @ 350mm
- 4x ref: 129 (ref:110 mm length)
- Minimum x 20 self adhesive loop fastener pads

TAILGATE COVER

- Minimum 20 self-adhesive loop fastener tabs



VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive hook & loop fastener to attach the Bootliner to the plastic / metal trim (**Not** the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any self-adhesive fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The fasteners cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**.

Unfortunately we are unable to supply this product, as it cannot be transported via our postal carrier.

NOTE: the adhesive takes 24hrs to reach full adhesion, do not disturb during.



PREPARATION

Remove the load cover cassette: It can be replaced later
Unlock the rear seat back rests and recline a little.

Please note the following photos are non-specific to your car

FITTING

BASE

- Place the liner into the car and fit the base snugly into place.

Photo A

- Push the two foam tabs down into the void between the rear seat and the boot floor.
- Re-lock the rear seat back rest to trap these tabs.

Photo B

- Use the self-adhesive loop fasteners to attach the base to the tailgate plate.
- Attach the self-adhesive fastener tabs to the hook fasteners on the liner. Peel off protective backing, reposition panel and apply **FIRM** pressure at tab location points to ensure maximum adhesion to structure.

Photo A



Photo B



Please note the following photos are non-specific to your car

FRONT - Photo C

- Hook & loop fastener straps align to headrests.
- Pass around each post and fasten back onto themselves.
- Use the self-adhesive fastener tabs to attach the two fastener welds to the plastic moldings.

REAR PLUS VERSIONS

- **YOU MUST UNFASTEN THE HOOK & LOOP HEADREST STRAPS BEFORE YOU FOLD THE REAR SEAT UPPERS** (*Please refer to REAR PLUS options on website to see detailed photo's*)

Split front versions

- The tie attaches to the locking bar of the middle seat/ski flap

SIDES

- Place the side panels snugly into place.

Photo D

- Unlock the two access panels in the sides of the car.
- Stick the 4 of Ref: 129 fastener tabs to the inner face of the panel. Refer to the photo for positioning, but ensure you align them to the fastener welds on the liner.

Photo E

- The non-adhesive section of the tab will wrap around over the front face of the access panel. Re-lock the panel doors, and fasten close the liner to these tabs.

Photo F+G

- Use the 2 long strips of self-adhesive loop fastener to attach the top edge of the side panels to the plastic trim.
- Use the self-adhesive loop fastener pads to attach the rear of the side panels to the plastic trim.

PLEASE NOTE

THE BOOTLINER WILL NOT ACCOMMODATE THE USE OF THE "BMW Extended Storage Rails"

Photo C



Photo E


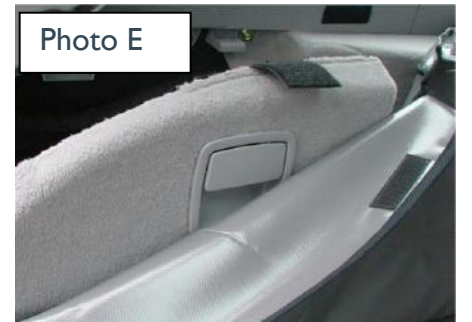


Photo F



Photo G

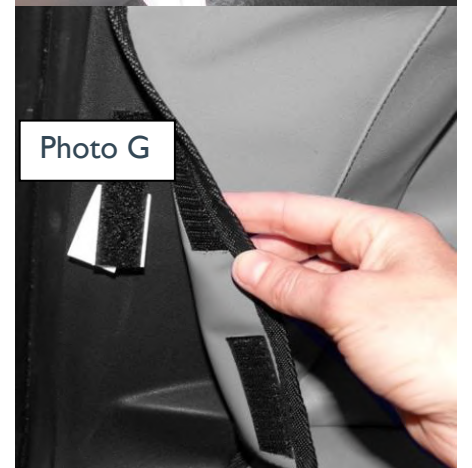

Please note these photos are non-specific to your car.

TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the Rear Plus Option(s). With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot Liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts



BUMPER FLAP

- Fit Bootliner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.
- Please note that the edges of the fabric are not bound so that any mud, dirt or water can run off.



REAR PLUS (Seat Split)

- Rear Plus with Seat Split allows use of 40/20/40 (Ski Flap) split on seats.