

## JAGUAR XF Sportbrake 2012 on

Our ref: H0573



**REF: 121**



SELF-ADHESIVE VELCRO TABS



Packing requirements

BOOT LINER



4 ref 121 (plastic/ loop fastener tab)  
1600mm cut length of 30mm self-adhesive loop fastener  
Minimum of 10 self-adhesive loop fastener tabs

REAR DOOR COVER



Minimum of 12 self-adhesive loop fastener tabs



Please Note: This is a Rear Plus version  
Boot Liner prepared for an additional  
Bumper Flap

### VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive hook & loop fastener to attach the boot liner to the plastic / metal trim (**Not** the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any hook & loop fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The hook & loop fasteners cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**.



**NOTE:** the adhesive takes 24hrs to reach full adhesion – do not disturb during.

### PREPARATION

- Remove the parcel shelf, it can be replaced later. Unlock the rear seats and fold flat.
- You will need a pair of scissors and a spoon



### FITTING

*Please note: some photos are non specific to your vehicle.*

#### BASE

- Place the liner into the car and fit the base snugly into place.
- Use the self-adhesive loop fastener tabs to attach the tailgate end to the chrome trim.
- Ensure the base is sitting straight and not skewed before you.....
- Push the two foam tabs down into the void between the rear seat and the boot floor.
- Re-lock the rear seat uppers.



## FRONT


- Hook & loop fastener straps align to headrests.
- Pass around each post and fasten back onto themselves.

### NOTE: REAR PLUS / SPLIT VERSIONS

- **YOU MUST UNFASTEN THE HOOK & LOOP FASTENER STRAPS BEFORE YOU RECLINE THE REAR SEAT UPPERS** (*Please refer to REAR PLUS options on website to see detailed photo*)



**REF 121**

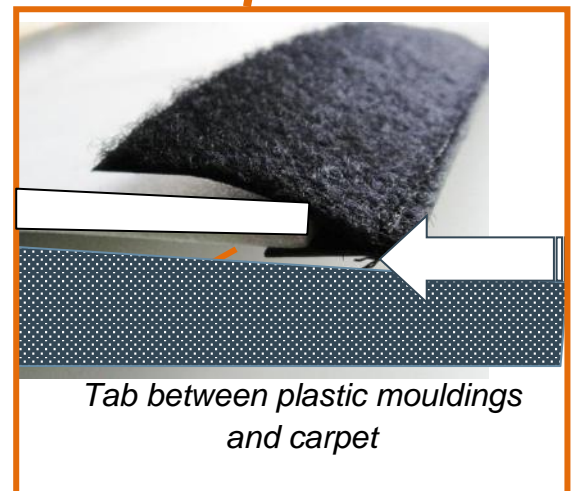

## SIDES

- Carefully position the side panels snugly into place.
- The bound cut-outs correspond with the interior lights.
- Use the 30mm wide self-adhesive loop fastener to attach the side to the plastic trim.
- Locate where the two sets of hook fastener welds are on the ends of the side panels. The ref: 121 plastic/loop fastener tabs once fitted will fasten to these.

### Fitting the ref: 121 tabs

- Hold back the rubber seal on the door aperture.
- You may find it helps if you carefully feed the spoon handle into the exposed void behind the carpeted panel to increase the void.
- Push the plastic section of the ref; 121tab into this void.
- Reposition to align with the hook fastener welds on the Liner.
- Fasten hook & loop fastener.

## Optional extras

*Please note these photos are non specific to your vehicle.*



### BUMPER FLAP

- Fit boot liner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.
- Please note that the edges of the fabric are not bound so that any mud, dirt or water can run off.

### SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the **Rear Plus** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot Liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.
- Be aware the Seat flap may cover your rear seat belts, so please ensure they do not obstruct them if in use.

### TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.
- The four hook & loop fastener straps pass behind and then over the door handles to fasten back onto the cover.