

LAND ROVER DISCOVERY SPORT 2015 onwards

Our ref: H0597

Packing Requirements

- ☐ BOOTLINER
 - 2 x Ref: 117's (loop+hook fastener tabs)
 - 750mm cut length of self-adhesive loop fastener
- ☐ 5 self-adhesive loop fastener tabs
- ☐ REAR DOOR COVER
 - Minimum of 27 self-adhesive loop fastener tabs



REF: 117



PREPARATION

- Remove the load cover. It may be replaced later.
- Fold the 3rd row seats Flat – they cannot be used.
- Slide the rears seats (Row 2) as far back to the tailgate as possible and set the seat uppers to your specified order: "Upright" OR "Reclined"




VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive hook & loop fastener to attach the Bootliner to the plastic / metal trim (**Not** the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any self-adhesive fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The fasteners cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**.


Unfortunately we are unable to supply this product, as it cannot be transported via our postal carrier.

NOTE: the adhesive takes 24hrs to reach full adhesion – do not touch during.



BASE

- Unfold the Hatchbag and place in the vehicle. The panel with the Hatchbag label sits against the back of the rear seat.
- Position the base of the Bootliner snugly into place.
- The hook fasteners welded to the reverse face of the base will attach directly to the carpet.

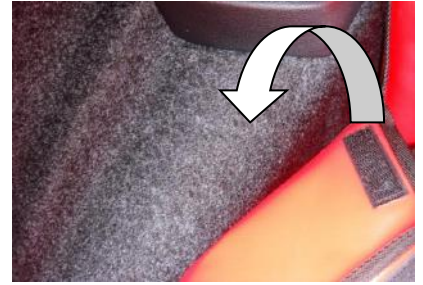

FITTING FRONT

- Hook & loop fastener straps align to headrests.
- Pass around each post and fasten back onto themselves.



REAR PLUS VERSIONS


- **YOU MUST UNFASTEN THE HOOK & LOOP FASTENERS / THE HEADREST STRAPS BEFORE YOU RECLINE THE REAR SEAT UPPERS EITHER MANUALLY OR ELECTRICALLY**

SIDE

- Fix the 3rd row seat belts:
Pin back the seat belt webbing using the two Ref: 117

Position them as shown in this image, so as to not prevent the hook fastener on the side panels attaching to the carpet.

- The majority of the side panel attaches directly to the carpet.
- Use the self adhesive loop fastener tabs to fix the front section to the plastic trim.

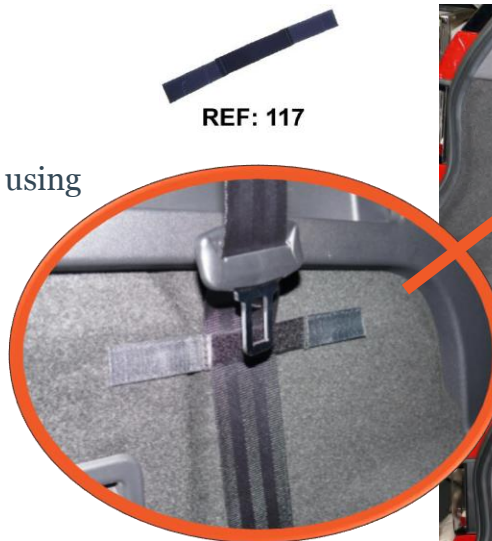

BACK

- Cut to length from the strip of self-adhesive loop fastener supplied and attach the back panel to the plastic trim.



Please note these photos are non-specific to your car.

OPTIONAL EXTRAS

SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the Rear Plus / Split options. With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Lower the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot Liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts



BUMPER FLAP

- Fit Bootliner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.
- Please note that the edges of the fabric are not bound so that any mud, dirt or water can run off.



TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.
- Pass the fastener strap under the grab handle and then fasten close onto the front of the cover.

