

Ford Tourneo Custom L2 - 2021 Onwards

Our ref: H0862

FITTING KIT CONTENTS:

BOOT LINER

Self-adhesive loop fasteners:

- 1 x 470 mm 50mm wide
- 1 x 400 mm 50mm wide
- 1 x 360 mm 50mm wide
- 1 x 350 mm 50mm wide
- 1 x 320 mm 50mm wide

- 1 x 960 mm 30mm wide
- 1 x 860 mm 30mm wide
- 1 x 680 mm 30mm wide
- 1 x 420 mm 30mm wide
- 1 x 260 mm 30mm wide



Rear Plus with Seat Split boot liner prepped for a seat flap and bumper flap.

TAILGATE COVER

- 18 x tabs self-adhesive loop fastener
- 1 x 1350 mm 30mm wide self-adhesive loop fastener



VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and valeting.

To do this please:

1. Use a silicone remover, such as AutoGlym Intensive Tar Remover, and apply generously to the surface you want to adhere to.
2. Using a separate clean, dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 and 2 if necessary.) Extra tabs have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

**The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available on our website.*



STEP 1. PREPARATIONS

- Put the headrests in their highest position.
- **PLUS / SPLIT VERSION ONLY** - Fasten the hook & loop fasteners between the side panels and the seat panel. (Image A)




STEP 2. FITTING THE BASE AND BACK

- Place the boot liner into the car boot with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. Align the hook fasteners on the underside with the right and left edges between boot floor and sides. The hook fasteners attach directly to the carpet. (Image B)
- Ensuring the base is properly aligned with the boot floor, stick the

- Green 680 mm loop fastener

- Orange 420 mm loop fastener

to the panel located on either side of the lock at the tailgate end of the boot area. Attach the boot liner to it using the hook fastener on the liner. (Image C)

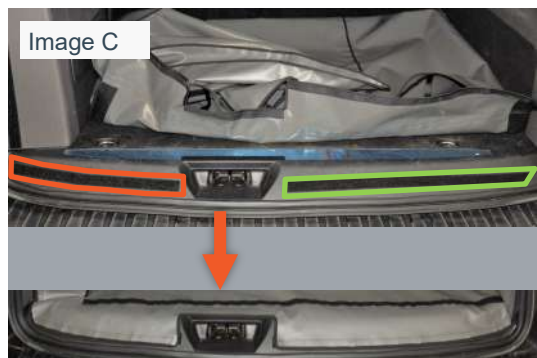

STEP 3A. FITTING THE LEFT SIDE

- On the left side of the boot stick the following loop fasteners in line with the hook fasteners sewn & welded on the reverse side of the boot liner as highlighted on Image D & E.

- Pink 860 mm loop fastener

- Yellow 350 mm loop fastener

- Blue 320 mm loop fastener

- Orange 360 mm loop fastener



STEP 3B. FITTING THE RIGHT SIDE

- On the right side of the boot stick the following loop fasteners in line with the hook fasteners sewn & welded on the reverse side of the boot liner as highlighted on **Image F & G**.
 - Blue 400 mm loop fastener
 - Pink 960 mm loop fastener
 - Orange 470 mm loop fastener
- Fasten the hook fastener sewn onto the top and back edge on both sides of the boot liner directly onto the previously attached loop fasteners. (**Image H**)



STEP 4. FITTING THE FRONT

- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (**Image I & J**). Make sure to hold the front part of the base in position to avoid pulling the boot liner too far up. Repeat the procedure with the left and right headrests.

REAR PLUS VERSIONS

You **MUST** unfasten the hook & loop fasteners and the headrest straps before you recline the upper part of the rear seats. (*Please refer to REAR PLUS / SPLIT options on website to see detailed photo.*)



OPTIONAL EXTRAS

Please note: not all of the photographs are specific to your vehicle.

STEP 6A. SEAT FLAP

The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.

- Lower the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot liner just below the top of the rear seats. (Image 1)
- The flap is then placed over the rear head rests and down the front of the passenger seats. (Image 2)
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.
- The Seat Flap can also be used in conjunction with the **Rear Plus** or **Split** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage forward. (Image 3)



STEP 6B. TAILGATE COVER

- Line up the tailgate cover with the tailgate and clean the areas where the self-adhesive loop fastener tabs will be stuck onto the plastic. (Image 4)
- Other tabs in liner with carpeted area, will attach directly to the carpet.
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



STEP 6C. BUMPER FLAP

- Fit the boot liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the boot liner. (Image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.

