

MAZDA 5


2005 on

Patt.ref: HO415

**2nd row seats slid as far
back to the tailgate.**

Packing Requirements:

- BOOTLINER
Minimum of 32 self-adhesive loop fastener tabs
- TAILGATE COVER
Minimum of 19 self-adhesive loop fastener tabs



VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive hook & loop fasteners to attach the Bootliner to the plastic / metal trim (**Not** the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is **highly likely there will be a build-up of silicone**. Before applying any self-fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The fasteners cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly **any residue with a separate clean dry cloth**. **NOTE:** the adhesive takes 24hrs to reach full adhesion – do not touch during.

PREPARATION

- Remove the load cover.
- Ensure the 2nd row seats slid as far back to the tailgate.
- Unfold the Hatchbag and place in the vehicle so that the base fits snugly in position. The panel with the Hatchbag label sits against the back of the rear seat.

Please note not all of the photographs are specific to your vehicle

BASE

- Position the base snugly into place. Start behind the back of the rear seats
- The hook fasteners welded to the reverse face of the liner will attach directly to the carpet panels.



FITTING FRONT

- Hook & loop fastener straps align to headrests.
- Pass around each post and fasten back onto themselves.

REAR PLUS VERSIONS

- **YOU MUST UNFASTEN THE HOOK & LOOP FASTENERS + THE HEADREST STRAPS BEFORE YOU RECLINE THE REAR SEAT UPPERS ('Please refer to REAR PLUS options on website to see detailed photo')**



SIDES


- Carefully position the side panels snugly into place.
- Use the self-adhesive loop fasteners to attach the side panel to the plastic trim.

Photo A

- 3rd row seat belts pass through the fastener close in the side panels.

Photo B

- Cut outs in side panels slide over the seat belt tides.

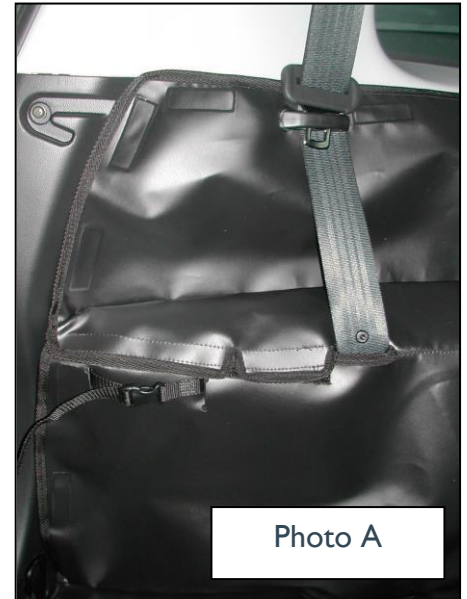

Optional extras

TAILGATE COVER

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



BUMPER FLAP

- Fit Bootliner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.
- Please note that the edges of the fabric are not bound so that any mud, dirt or water can run off.



SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the **Rear Plus** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot Liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.



FLOOR EXTENSION

The "Floor extension" offers superior protection to the rear seats when purchased in conjunction with a REAR PLUS option.

- The **Floor extension** is designed to attach to a Rear Plus version liner.
- It offers additional protection to the back of the front seats and the extended floor area when the rear seats are folded flat. The max width is 148cm (see photo on left). It will offer no protection to the rear doors



PLEASE REQUEST FURTHER INFORMATION AS YOU PLACE YOUR ORDER (**These items cannot be added at a late date**)