

#### FITTING INSTRUCTIONS

hatchbag.co.uk

### SKODA SUPERB ESTATE 2010 - 2015

Our ref: Ho527-FLOW

PACKING REQUIREMENTS

BOOT LINER

Minimum of 14 self-adhesive loop fastener tabs 880mm cut length of self-adhesive loop fastener.

REAR DOOR COVER

Minimum of 23 self-adhesive loop fastener tabs

#### **PREPARATION**

- Remove the load cover cassette. It can be replaced later.
- Unfold the Hatchbag and place in the vehicle so that the base fits snugly in position. The panel with the Hatchbag label sits against the back of the rear seat.



It is **NOT** possible to use the "Partition+ Tether System" once the boot liner has been fitted.



#### VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive loop fastener to attach the boot liner to the plastic / metal trim (Not the carpet); it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many valeting products. It is highly likely there will be a build-up of silicone. Before applying any loop fastener pads, the surface MUST be thoroughly cleaned using a silicone remover. (The loop fastener cannot be used once it has been in contact with silicone). We recommend "Intensive Tar Remover" made by AutoGlym and available from Halfords. Wipe off thoroughly any residue with a separate clean dry cloth.






**NOTE:** the adhesive takes 24hrs to reach full adhesion – do not disturb during.

Please note some of these photos are non-specific to your vehicle.

#### **BASE**

- Position the base snugly into place. Start at the tailgate end.
- The hook fastener welds will attach directly to the carpet.



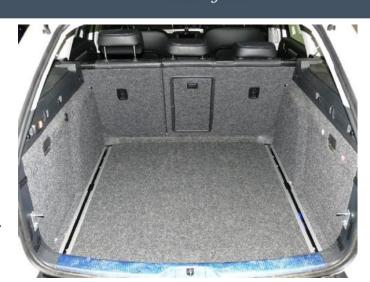

#### FITTING FRONT

- Hook & loop fastener straps align to headrests.
- Pass around each post and fasten back onto themselves.
- The hook fastener will attach directly to the carpet.

## Hatchbag BOOTLINEES

#### NOTE: REAR PLUS VERSIONS

• YOU MUST UNFASTEN THE HOOK & LOOP FASTENER + THE HEADREST STRAPS BEFORE YOU RECLINE THE REAR SEAT UPPERS (Please refer to REAR PLUS options on website to see detailed photo')

TOP Attaches directly to the carpet



"RECESS" Model: Section attaches to plastic with long loop fastener strip



REAR END Self-adhesive loop fastener onto plastic



#### SIDES

- Carefully position the side panels snugly into place.
- The hook fastener welded to the reverse face of the sides will attach directly to the carpet panels.

HOWEVER, if you have the "RECESS" model – there is a section of the side panel that sits onto the plastic trim – cut to length the long self-adhesive loop fastener strip supplied and attach to the plastic.

• Use the small self-adhesive loop fastener tabs to attach the rear end of the sides to the plastic trim

#### **BACK**

• Use the self-adhesive loop fastener tabs to attach the back panel to the plastic trim



#### **OPTIONAL EXTRAS**

Please note this photo is non-specific to your vehicle

#### TAILGATE COVER

• Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



#### FREQUENT USE KIT

If you intend to frequently remove/fit the boot liner from/to your vehicle, please note that the carpet will "fluff" up – we have an alternative "Frequent use fitting kit" – ask our sales team or see our on-line "factory shop".





Please note the following photos are non-specific to your vehicle

#### **BUMPER FLAP**

- Fit boot liner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.

# Such Asian A

#### **SEAT FLAP**

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the **Rear Plus** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the boot liner just below the top of the rear seats.
- The flap is then placed over the rear head rests and down the back of the passenger seats.
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.



