

SKODA KODIAQ - 2017 on

7 SEATER - ROW 3 FOLDED

OUR REF: H0663-SE7

PACKAGING REQUIREMENTS.

BOOT LINER

- **2x 760 mm** 20mm wide self-adhesive loop fastener
- **4x tabs** self-adhesive loop fastener

TAILGATE COVER

- **26 x tabs** self-adhesive loop fastener



Split boot liner with bumper flap, seat flap and boot liner extension prep



VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener sticks to the plastic trim, you **MUST CLEAN** the plastic from grime and **REMOVE** all the **SILICONE** applied during manufacture and valeting.

To do this please:

1. Use a silicone remover, such as 'Auto-Glym Intensive Tar Remover' and apply generously to the surface you want to adhere to.
2. Using a separate clean & dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach 1 loop fastener tab to see if it sticks. (Repeat step 1 to 2 if necessary)
3. Attach the loop fastener and let them fully adhere over the next 24 hours for the best bond.



**The hook & loop fastener cannot be used once it has been in contact with silicone. Replacement kits are available from our website.*

STEP 1. PREPARATIONS

- Fold the 3rd row seats flat, they will not be usable with the boot liner re-installed.
- Set the 2nd row seats to be most upright. **(image A)**
- Slide the 2nd row bench backwards, as far to the tailgate as possible. **(image A)**



STEP 2. FITTING THE BASE AND BACK

- Place the boot liner into the car boot with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges and into the side recesses.
- The hook fastener welded to the reverse of the front edge face fix directly to the carpet. **(image B)**



Attach the 760mm long self-adhesive loop fastener strips along the tailgate edge of the boot starting from the lock in the middle going along the plastic panel edge. Cut the loop fastener at the ridge highlighted in yellow. **(image C)**.

- Keep the remainder of the loop fastener till step 4



STEP 3. FITTING THE FRONT

- **- PLUS / SPLIT VERSION ONLY** - fasten the hook & loop fastener between the side panels and the seat panel. **(image D)**
- Starting with the middle headrest, loop the hook & loop fastener straps around both headrest posts. **(image E)**. Make sure to hold the front part of the base in position as not to pull the boot liner too far up. Repeat the procedure with the left and right headrests.



REAR PLUS VERSIONS

You **MUST** unfasten the hook & loop fastener + the headrest straps before you recline the rear seat uppers. *(Please refer to REAR PLUS / SPLIT options on website to see detailed photo)*

STEP 4. FITTING THE SIDES

- Fasten the hook fastener sewn onto the top edge of the boot liner sides directly onto the carpet along the top edge of the carpeted boot sides. (image F). Note! the tape should sit slightly above the carpeted edge.
- Attach 1 self-adhesive loop fastener tab (highlighted in orange) to the front part of the side panel in line with the welcro welded to the boot liner sides. Fasten the boot liner to it. (image F)
- Attach the remainder of the loop fastener strip from step 2 onto the plastic surface going from the ridge up the rear sides to the hook. Attach in line with the hook fastener welded onto the boot liner - **note!**; this loop fastener is stepped slightly in from the previous loop fastener. (image G & H)
- Attach 1 self-adhesive loop fastener tab (highlighted in green) under the hook on the side panel, and next to the top edge of the loop fastener. (image G)
- Attach the boot liner to the previously attached loop fastener.


IMAGE F



IMAGE G



IMAGE H

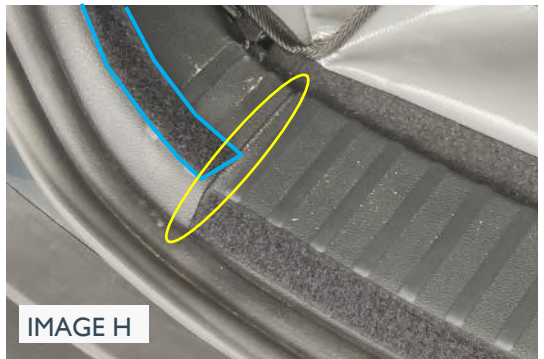

OPTIONAL EXTRAS

Please note the following photos are non-specific to your vehicle

STEP 5A. SEAT FLAP

- The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.
- The Seat Flap can also be used in conjunction with the **Rear Plus** or **Split** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage forward. (image 3)
- Lower the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the boot liner just below the top of the rear seats. (image 1)
- The flap is then placed over the rear head rests and down the back of the passenger seats. (image 2)
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.

STEP 5B. TAILGATE COVER



- Line up the tailgate cover with the tailgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. (image 4)
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.

STEP 5C. BUMPER FLAP

- Fit boot liner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner. (image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.



OPTIONAL EXTRAS page 2

Please note the following photos are non-specific to your vehicle

STEP 5D. FLOOR EXTENSION

The “Floor extension” offers superior protection to the rear seats when purchased in conjunction with a REAR PLUS option.(image 6)

- The Floor extension is designed to attach to a Rear Plus version liner.
- It offers additional protection to the back of the front seats and the extended floor area when the rear seats are folded flat.
- The max width is 148cm (see photo on left).
- It will offer no protection to the rear doors

The Seat Flap 5A, The Bumper Flap 5C & The Floor Extension 5D cannot be added at a late date

STEP 5E. FREQUENT USE KIT

- If you frequently remove/fit your boot liner from/to your vehicle please note that the carpet will “fluff” up – we have an alternative “Frequent Use Fitting Kit” (image 7+8)

The Frequent Use Kit is available to buy from our “on-line” Factory Shop – simply add it to your order from the Factory Shop. These can also be ordered at a later date.

