

Lexus RX L (7 seater) – 2018 on

our ref: H0731

Packaging requirements:

BOOT LINER

- **2 x 370mm** 30mm wide self-adhesive loop fastener
- **2 x 440mm** 30mm wide self-adhesive loop fastener
- **-ONLY 3rd Row folded version-**
- **2 x tabs** ref. 117



REF: 117

TAILGATE COVER

- **9 x tabs** self-adhesive loop fastener



3rd row folded Rear split, prepared for bumper flap

3rd row usable Rear plus, prepared for bumper flap



VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** the plastic from grime and **REMOVE** all the **SILICONE** applied during manufacture and valeting.

To do this please:

1. Use a silicone remover, such as 'Auto-Glym Intensive Tar Remover' and apply generously to the surface you want to adhere to.
2. Using a separate clean & dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach 1 self-adhesive fastener tab to see if it sticks. (Repeat step 1 to 2 if necessary) A couple of spares have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

**The self-adhesive fasteners cannot be used once it has been in contact with silicone. Replacement kits are available from our website.*




STEP 1. PREPARATIONS

- Remove the load cover. It may be replaced later.
- Put the headrests in their highest position.
- Set the seats in upright position.



-ONLY FOR 3rd row folded-

- Place the 3rd row seatbelts on its correspondent boot side pin (image B)
- Attach the ref.117 tabs (highlighted in blue -

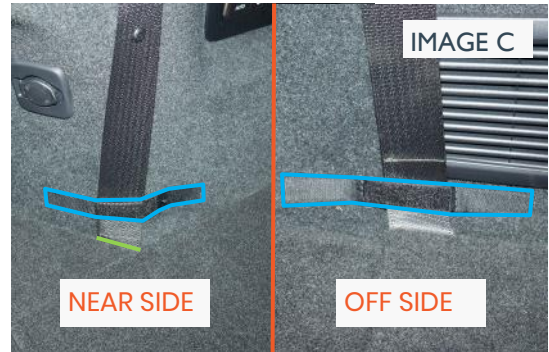

STEP 2. FITTING THE BASE

- Place the boot liner into the car boot with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. The hook fasteners welded to the reverse face fix directly to the carpet. (image D)



STEP 3. FITTING THE FRONT

- - PLUS / SPLIT VERSION ONLY - fasten the hook & loop fasteners between the side panels and the seat panel. (image E)
- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (image F). Make sure to hold the front part of the base in position as not to pull the boot liner too far up. Then fasten the hook fastener strips sewn on the top of the front part of the boot liner directly to the top part of the carpeted back of the seats. (white arrows - image F)



REAR PLUS VERSIONS


You MUST unfasten the hook & loop fasteners + the headrest straps before you recline the rear seat uppers. (Please refer to REAR PLUS / SPLIT options on website to see detailed photo)


STEP 4. FITTING THE SIDES

- Fasten the hook fastener sewn onto the top edge of the boot liner sides directly onto the carpet along the top edge of the carpeted boot sides (image E)



STEP 5. FITTING THE BACK

-  Stick the 2 x 370mm loop fastener strips onto the plastic panel located at the tailgate end of the boot side and in line with the hook fastener sewn onto the reverse side of the boot liner. (image H) Repeat on opposite side.
- Snip the self-adhesive fastener strips in the corners to ease around the bend.
- Stick the 2 x 440mm loop fastener strips onto the back panel located on both sides of the lock at the tailgate end of the boot in line with the hook fastener sewn onto the reverse side of the boot liner. (Image I)
- Fasten the boot liner to them using the hook fastener sewn onto it.

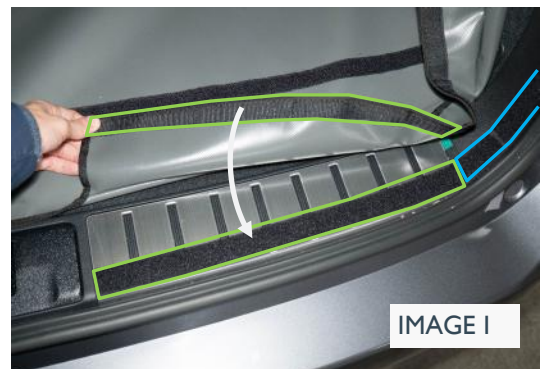

OPTIONAL EXTRAS


Please note the following photos are non-specific to your vehicle

STEP 5A. SEAT FLAP/TAILORED SEAT FLAP

- The Seat Flap/Tailored Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc. (image 1 & 2)
- Lower the headrests
- Attach the Seat Flap/ Tailored Seat Flap to the loop fastener strip that has been manufactured into the Boot liner just below the top of the rear seats. (image 1 & 2)
- The flap is then placed over the rear head rests and down the back of the passenger seats. (image 1 & 2)
- If you choose the Tailored Seat Flap and a Rear Plus/Split we include an additional Seat Flap that is **only** to be used in conjunction with the **Rear Plus/Split**.
- With the rear seats in the folded position the Seat Flap extends the coverage over any exposed section of the seat backs and the headrests. (image 3)



STEP 5B. TAILGATE COVER

-  Line up the tailgate cover with the tailgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. (image 4)
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



STEP 5C. BUMPER FLAP

- Fit boot liner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the boot liner. (image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.



OPTIONAL EXTRAS page 2

Please note the following photos are non-specific to your vehicle

STEP 5D. FLOOR EXTENSION

The 'Floor extension' offers superior protection to the rear seats when purchased in conjunction with a REAR PLUS option. (image 6 & 7)

- The Floor extension is designed to attach to a Rear Plus/Split version liner.
- It offers additional protection to the back of the front seats and the extended floor area when the rear seats are folded flat.
- It will offer no full protection to the rear doors
- Attach the floor extension to the main boot liner (Image 6)
- Tie the two laces in the corner together (Orange arrows - Image 7)
- Fasten the hook & loop fastener straps around both headrest posts. (Blue arrows—Image 7)

The Seat Flap 5A, The Bumper Flap 5C & The Floor Extension 5D cannot be added at a late date

STEP 5E. FREQUENT USE KIT

- If you frequently remove/fit your boot liner from/to your vehicle please note that the carpet will "fluff" up – we have an alternative "Frequent Use Fitting Kit" (image 8+9)

The Frequent Use Kit is available to buy from our "on-line" Factory Shop – simply add it to your order from the Factory Shop. These can also be ordered at a later date.

