

Mitsubishi ASX - 2013 Onwards

our ref: H0793-SPKNO

FITTING KITS CONTENTS

- 4 x 380 mm 30mm wide self-adhesive loop fastener
 - 1 x 230 mm 30mm wide self-adhesive loop fastener
 - 1 x 170 mm 30mm wide self-adhesive loop fastener
 - 2 x 150 mm 30mm wide self-adhesive loop fastener
 - 5 x tabs self-adhesive loop fastener
- TAILGATE COVER
- 20 x tabs self-adhesive loop fastener



Split boot liner prepped for a boot liner extension, seat flap and bumper flap



VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and valeting.

To do this please:

1. Use a silicone remover, such as AutoGlym Intensive Tar Remover, and apply generously to the surface you want to adhere to.
2. Using a separate clean, dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 and 2 if necessary.) Extra tabs have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

**The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available on our website.*



STEP 1. PREPARATIONS

- Remove the load cover. It may be replaced later.
- Put the headrests in their highest position.



STEP 2. FITTING THE BASE

- Place the boot liner into the car boot with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. The hook fasteners on the underside attach directly to the carpet. (Image B)



STEP 3. FITTING THE FRONT

- **PLUS / SPLIT VERSION ONLY** - Fasten the hook & loop fasteners between the side panels and the seat panel. (Image C)
- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (Image D). Make sure to hold the front part of the base in position to avoid pulling the boot liner too far up. Repeat the procedure with the left and right headrests.

REAR PLUS VERSIONS



You **MUST** unfasten the hook & loop fasteners and the headrest straps before you recline the upper part of the rear seats. (Please refer to **REAR PLUS / SPLIT options on website to see detailed photo.**)



STEP 4. FITTING THE SIDES




- Push the liner inside the pockets (white arrows - image G & H)
- On both sides of the boot stick the following loop fasteners in line with the hook fasteners sewn & welded on the reverse side of the boot liner as shown highlighted on image E & F.
 - Green 380 mm loop fastener
 - Orange 230 mm loop fastener
 - Pink 170 mm loop fastener
 - Yellow 150 mm loop fastener
 - Blue loop fastener tabs
- If necessary snip the self-adhesive fastener strips at the corners to ease around the curves.
- Fasten the hook fastener sewn onto the top and back edge on both sides of the boot liner directly onto the previously attached loop fasteners. (image E & F)

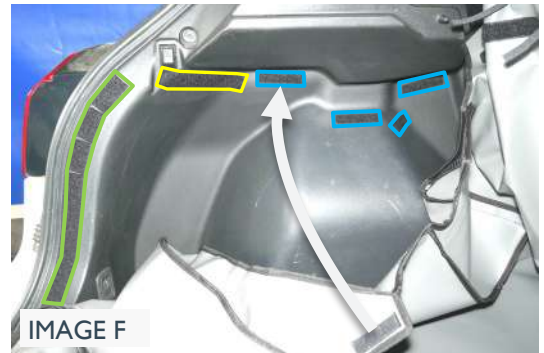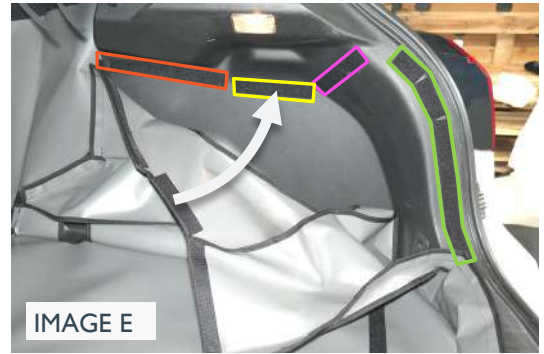

STEP 5. FITTING THE BACK

- Stick 2 x 380mm self-adhesive loop fasteners onto the plastic panel located on both sides at the tailgate end of the boot (highlighted in green - image I). Fasten the boot liner to them using the hook fastener sewn on the reverse side of the boot liner.

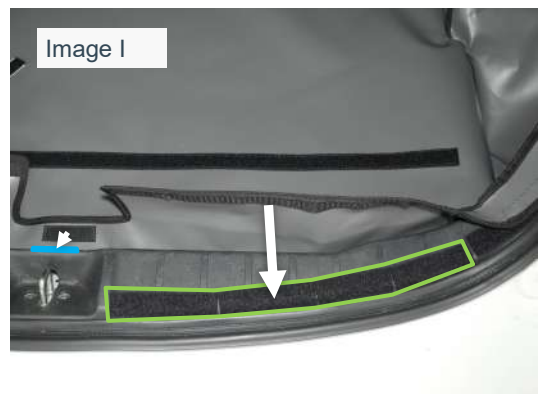

OPTIONAL EXTRAS

Please note: the following photos are not specific to your vehicle.

STEP 5A. SEAT FLAP

The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.

- Lower the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot liner just below the top of the rear seats. (Image 1)
- The flap is then placed over the rear head rests and down the front of the passenger seats. (Image 2)
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.
- The Seat Flap can also be used in conjunction with the **Rear Plus** or **Split** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage forward. (Image 3)

STEP 5B. TAILGATE COVER

- Line up the tailgate cover with the tailgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. (Image 4)



Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.

STEP 5C. BUMPER FLAP

- Fit the boot liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the boot liner. (Image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.



OPTIONAL EXTRAS PAGE 2

Please note: the following photos are not specific to your vehicle.

STEP 5D. BOOTLINER EXTENSION

The Bootliner extension provides superior protection for the rear seats when purchased with a REAR PLUS option. (image 6 & 7)

- The boot liner extension is designed to attach to a Rear Plus/Split version liner.
- It provides additional protection for the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors
- Attach the boot liner extension to the main boot liner (Image 6)
- Fasten the two ties in the corner together (Orange arrows - Image 7)
- Fasten the hook & loop fastener straps around the headrest posts. (Blue arrows - Image 7)
- Attach the hook fastener tab welded on the back corner of the boot liner extension to the boot liner on the boot side (Green arrow - image 8)
- Repeat on opposite side



Please Note: The Seat Flap 5A, the Bumper Flap 5C & the Bootliner Extension 5D cannot be added at a later date.