

## Ford Puma - 2019 Onwards

our ref: H0798

### FITTING KIT CONTENTS :

- BOOT LINER
  - 2 x 270 mm 30mm wide self-adhesive loop fastener
  - 1 x tabs self-adhesive loop fastener
- TAILGATE COVER
  - 18 x tabs self-adhesive loop fastener



Left: SH1 plus boot liner prepped for a boot liner extension

Right: SH2 split boot liner prepped for a seat flap and bumper flap



### VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and valeting.

To do this please:


1. Use a silicone remover, such as AutoGlym Intensive Tar Remover, and apply generously to the surface you want to adhere to.
2. Using a separate clean, dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 and 2 if necessary.) Extra tabs have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

*\*The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available on our website.*



## STEP 1. PREPARATIONS

- Remove the load cover. It may be replaced later.
- Set the floor level to fit the specification of your order.
- Raise the headrests (Image A)
- **SH2 & SH3 ONLY** - Move the floor as far front as possible (white arrow - Image A)

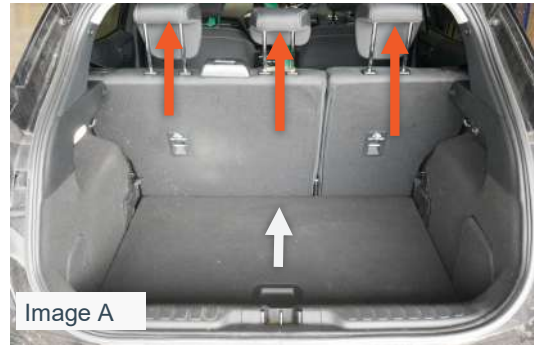

## STEP 2. FITTING THE BASE

- Place the boot liner into the car boot with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. (Image B)



## STEP 3. FITTING THE FRONT

- **PLUS / SPLIT VERSION ONLY** - Fasten the hook & loop fasteners between the side panels and the seat panel. (Image C)
- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (Image D). Make sure to hold the front part of the base in position to avoid pulling the boot liner too far up. Repeat the procedure with the left and right headrests.



## REAR PLUS VERSIONS


You **MUST** unfasten the hook & loop fasteners and the headrest straps before you recline the upper part of the rear seats. (Please refer to **REAR PLUS / SPLIT** options on website to see detailed photo.)

## STEP 4. FITTING THE SIDES

- The side panels of the boot liner are attached directly to the carpeted area on the sides of the boot. Align the hook fasteners along the top and back edge of the boot liner side panel with the edges of the carpeted area. (Images E, G, H & I)
- **SH2 & SH3 ONLY** - Fit the liner around the plastic protrusions on both sides (white arrow - Image G, H & I)



SH1 boot liner left side

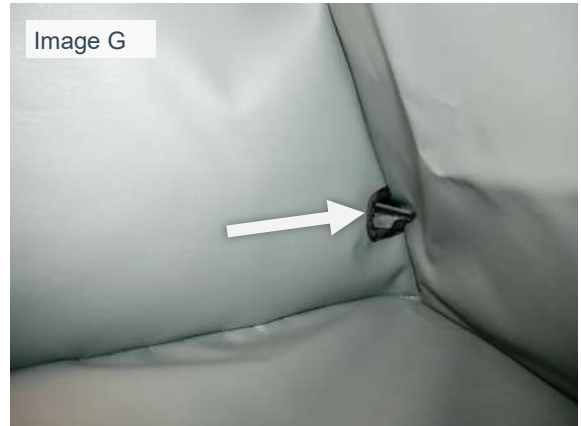

SH2 boot liner left side



SH3 boot liner left side

## STEP 5. FITTING THE BACK



Stick the **2 x 270 mm** 30mm wide self-adhesive loop fastener to the panel located on either side of the lock at the tailgate end of the boot area. Attach the boot liner to it using the hook fastener sewn on the liner. (highlighted in orange - Image J)



Stick 1 self-adhesive fastener tab to the inside centre of the back panel, aligned with the hook fastener on the back panel of the boot liner (highlighted in yellow - Image J)





## OPTIONAL EXTRAS

Please note: the following photos are not specific to your vehicle.

### STEP 5A. SEAT FLAP

The Seat flap is designed to protect the top of your rear seat giving additional protection from drooling dogs etc.

- Lower the headrests
- Attach the Seat Flap to the loop fastener strip that has been manufactured into the Boot liner just below the top of the rear seats. (Image 1)
- The flap is then placed over the rear head rests and down the front of the passenger seats. (Image 2)
- If the Seat Flap sits over large headrests and obstructs your rear view: carefully create openings in the flap to accommodate the headrest posts.
- The Seat Flap can also be used in conjunction with the **Rear Plus** or **Split** Option(s). With the rear seats in the folded position the Seat Flap extends the coverage forward. (Image 3)

### STEP 5B. TAILGATE COVER

- Line up the tailgate cover with the tailgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. (Image 4)



Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.

### STEP 5C. BUMPER FLAP

- Fit the boot liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the boot liner. (Image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the tailgate.



## OPTIONAL EXTRAS PAGE 2

Please note: the following photos are not specific to your vehicle.

### STEP 5D. BOOTLINER EXTENSION

The Bootliner extension provides superior protection for the rear seats when purchased with a REAR PLUS option. (image 6 & 7)

- The boot liner extension is designed to attach to a Rear Plus/Split version liner.
- It provides additional protection for the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors
- Attach the boot liner extension to the main boot liner (Image 6)
- Fasten the two ties in the corner together (Orange arrows - Image 7)
- Fasten the hook & loop fastener straps around the headrest posts. (Blue arrows - Image 7)
- Repeat on opposite side
- Fasten the ties on the seat lock d-ring (White arrow - Image 8)

**Please Note: The Seat Flap 5A, the Bumper Flap 5C & the Bootliner Extension 5D cannot be added at a later date.**

### STEP 5E. FREQUENT USE KIT

- If you frequently remove/install your boot liner from/to your vehicle, please note that the carpet will “fluff” up – we offer an alternative Frequent Use Fitting Kit. These tabs are placed between the boot liner and the boot carpet. (image 9 + 10)

The Frequent Use Kit is an accessory available to purchase from our on-line store

